

FO-ONLC

Decorative Grills for Onyx2

This option includes everything required to install laser-cut decorative grills on your Onyx2 fireplace.

❖ WARNING: USE ONLY GENUINE RSF PARTS. THE USE OF ANY SUBSTITUTES WILL DECERTIFY THE SYSTEM AND MAY PUT YOUR SAFETY AT RISK.

BOTTOM LOUVER INSTALLATION

- 1. The magnetic brackets go on the top flange of the bottom louver opening. Use a "U" clip to attach each magnetic bracket at each end of the flange. Make sure to pull the magnetic brackets forward so they are flush with the fireplace face (see Figure 1).
- 2. Move the air control handle towards the right so that the wood knob goes through the larger opening in the louver. Pass the wood knob through the bottom louver opening.
- 3. Engage both tabs of the bottom louver into the louver opening (see Figure 2). Rotate the top part of the louver to close it against the magnets.
- 4. Verify that the air control handle can move easily.

TOP LOUVER INSTALLATION

- 5. The top bracket goes over the top flange of the top louver opening. Make sure to center the bracket as best as possible. Slip the top bracket between the top flange and the inner casing (see Figure 3) and push it as forward as possible.
- 6. Engage both tabs of the top louver into the louver opening, just as you did for the bottom louver. Rotate the top part of the louver to close it against the fireplace facing. Make sure the magnets are not visible.
- 7. Insert one of the long screws provided through the top louver pattern as shown in Figure 4 and attach the top louver to the top bracket. Do the same for the second long screw.

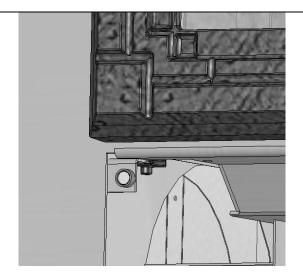


Figure 1 Bottom brackets installation

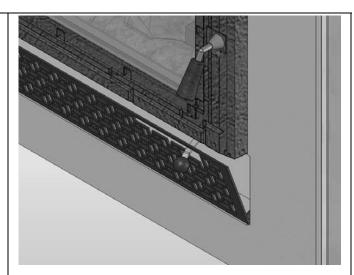


Figure 2 Bottom louver installation

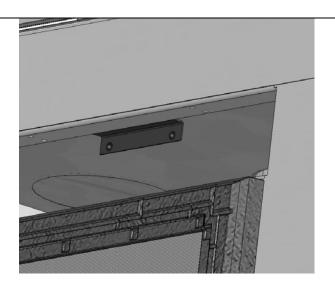


Figure 3 Top bracket installation




Figure 4 Top louver installation

Check List:

- ☐ 1 Top louver assembly (FO-ONLC-A01)
- ☐ 1 Bottom louver assembly (FO-ONLC-A02)
- ☐ 1 Top bracket (FO-ONLC-A03)
- ☐ 1 Left magnetic bracket (FO-ONLC-A04)
- ☐ 1 Right magnetic bracket (FO-ONLC-A04)
- ☐ 1 bag containing 2 screws ¼"-20 x 2 ½" (903021) and 2 U-clips (912011)
- ☐ Instructions and check list

